

 H2H



2500/3000/3500kg Forklift Truck

CPC(Q)D25/  
30/35H3

## 1 Robust performance for various industrial applications

The IC truck CPC(Q)D25/30/35H3 is powerful, easy to operate and dependable. The forklift for loads between 3,000 and 3,500kg is particularly well suited for high loads in multi-shift operation and assignments in the harshest outdoor conditions.



## 2 Durable components for long-term usage

The CPC(Q)D25/30/35H3 is equipped with pneumatic tyres as standard and mature components for long-term operation and big loads under heavy and harsh conditions.






## 3 Safety assurance

The CPC(Q)D25/30/35H3 offers outstanding visibility of the load and the surroundings. Its high ground clearance is ideal for uneven surfaces and other outdoor environments.





General		Manufacturer	H2H	H2H	H2H	H2H
1	Manufacturer		CPCD35	CPCD35	CPCD35	CPCD35
2	Model		Diesel	Diesel	Diesel	Gasoline
3	Power type		3500	3500	3500	3500
4	Rated capacity	Kg	500	500	500	500
5	Load center	mm	3000	3000	3000	3000
6	Lift height	B	145	145	145	145
7	Free lift height	E	1070x125x45	1070x125x45	1070x125x45	1070x125x45
8	Fork size	LxWxT	6/10	6/10	6/10	6/10
9	Mast tilt range	FR	K	K	K	K
10	Front overhang (wheel center to fork face)	FK (°)	M	M	M	M
11	Rear overhang		Y	Y	Y	Y
12	Length to face of forks		Q	Q	Q	Q
13	Overall width		C	C	C	C
14	Mast lowered height		A	A	A	A
15	Mast extended height		P	P	P	P
16	Overhead guard height		R	R	R	R
17	Turning radius					
18	Travel speed(laden/unladen)		18/19	18/19	18/19	18/19
19	Lifting speed(laden/unladen)		400/470	400/470	400/470	400/470
20	Lowering speed(laden/unladen)		410/450	410/450	410/450	410/450
21	Max drawbar pull (laden)	N	19000	19000	19000	19000
22	Max gradeability	%	20	20	20	20
23	Tires		28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR
24	Tread		6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
25	Wheelbase		1010	1010	1010	1010
26	Ground clearance		980	980	980	980
27	Service weight		1750	1750	1750	1750
28	Mast lowest position		150/120	150/120	150/120	150/120
29	Wheelbase center		170/150	170/150	170/150	170/150
30	Laden		4200	4200	4200	4200
31	Rear		6390	6390	6390	6390
32	Front		810	810	810	810
33	Unladen		1710	1710	1710	1710
34	Voltage / Capacity		2490	2490	2490	2490
35	Model		12/80	12/80	12/80	12/80
36	Manufacturer		SAS-DPEU2	A498BT1-39	4JG2	GK25
37	Rated output(p.m)		Mitsubishi	CHINA	ISUZU	GCT
38	Rated torque(p.m)		35.3/2250	36.8/2400	44.9/2450	37.4/2300
39	No. of cylinders		177/1700	186/1600-1800	184.7/1700	176.5/1600
40	Bore x Stroke		4	4	4	4
41	Emission		94x120	98x105	95.4x107	89x100
42	Fuel tank capacity		3331	3168	3059	2488
43	Manufacturer		60	60	60	60
44	Type		CHINA	CHINA	CHINA	CHINA
45	Stage		Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift
46	Operation pressure		1/1	1/1	1/1	1/1
47			17.5	17.5	17.5	17.5
48						

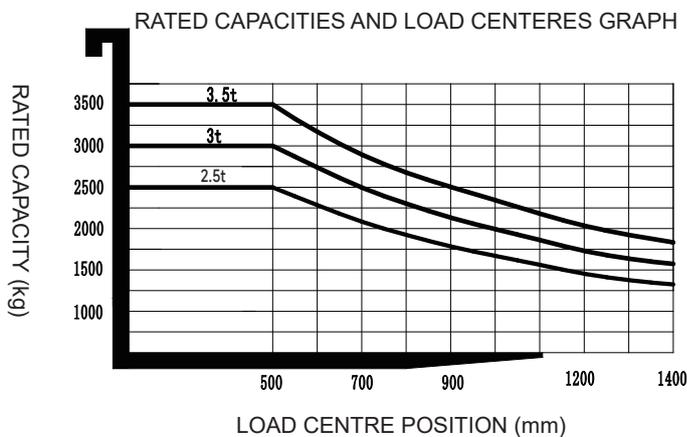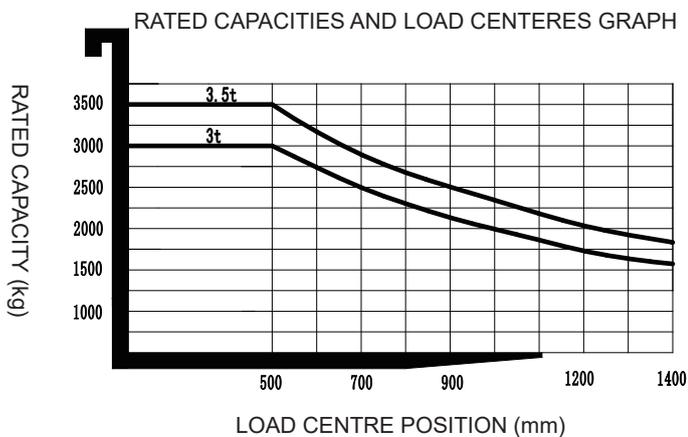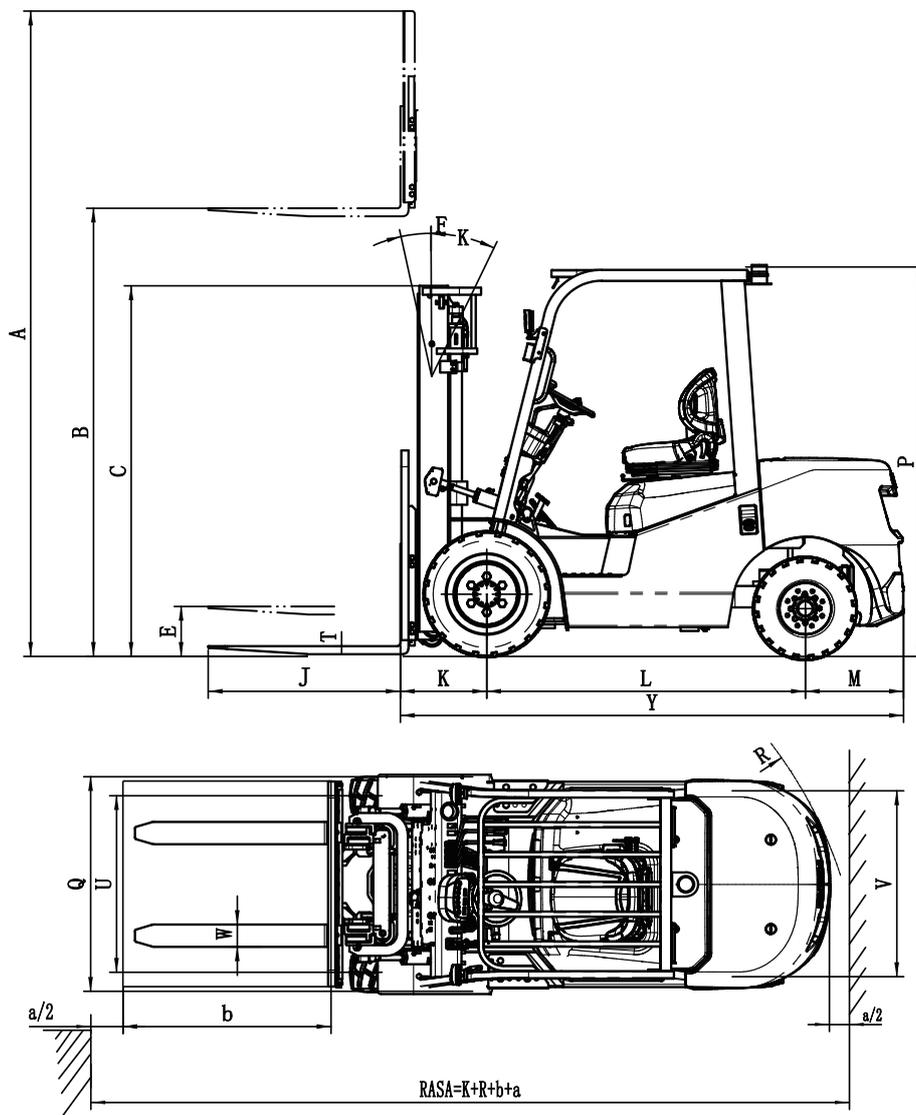



No.	Optional items	CPC(Q)D25/30/35H3
1.1	Fork dimensions	●122*45*1070○122*45*1150○122*45*1220○122*45*1370○122*45*1520 ○122*45*1600○122*45*1700○122*45*1820○122*45*2000○122*45*2200○122*45*2400
1.4	Fork carriage width	●1100mm○Yes and can be customized
1.5	Fork carriage height	●1095mm○Yes and can be customized
2.5	Front tyre	●Pneumatic○Solid○Non-marking solid
2.6	Rear tyre	●Pneumatic○Solid○Non-marking solid
2.7	Seat	●Regular○Premium○Suspension○Suspension + seatbelt logic switch
2.8	Attachment	●No○Built-in sideshift○External sideshift○Fork positioner
2.10	Traction pin	●Yes
3.4	Front light	●LED
3.5	Rear light	●No○LED
3.6	Warning light	●Yes
3.7	Steering light	●Yes
3.8	Blue spot	●No○2 front○1 rear○2 front + 1 rear
3.9	Area warning light	●No○Red lights on both sides
3.10	Rearview mirror	●1 rearview mirror○Add 2 on both sides
3.11	Buzzer	●Yes
3.16	OPS	●No○Yes and not customized
3.20	Remote monitoring	●No○Yes and not customized
4.1	Cabin	●No○Basic half cabin○Upgrade half cabin○Full cabin

Note: ●Standard ○Optional